


# 省配線連接線規範

## DQG-G50-2C-nM-B-LL 設計規範

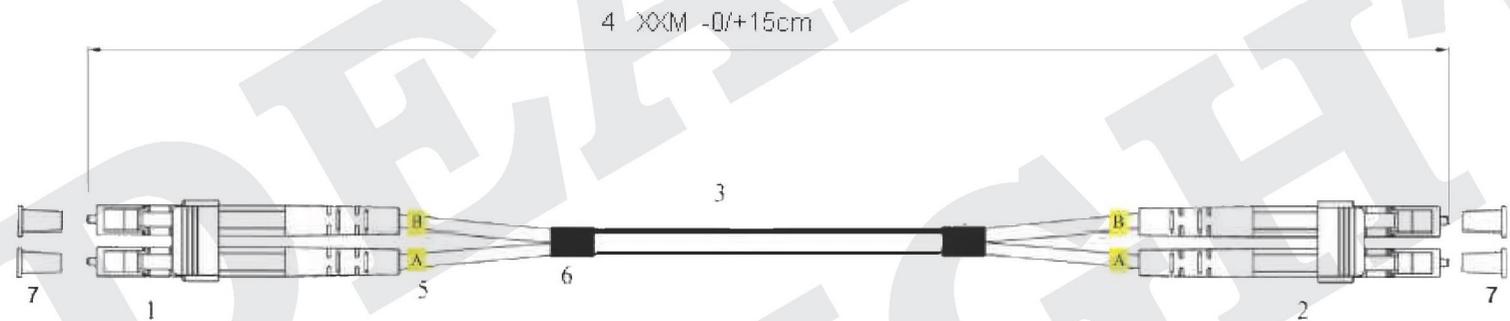

### Specification:

1. LC Connector MM 2.0mm
2. LC Connector MM 2.0mm
3. 2 Cores Distribution Cable
4. Length:  $\times\times\times -0/+15\text{cm}$
5. Cable Mark
6. Heat Shrink
7. Dust Cap

### Performance:

1. Insertion Loss:  $LC < 0.3\text{dB}$
2. Return Loss:  $LC > 35\text{dB}$
3. Insert-pull Test: 500Times  $< 0.5\text{dB}$
4. Operating Temperature:  $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
5. Tensile Resistance: 15kgf
6. Fiber Extension:  $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
7. Ferrule Radius:  $10 < R < 30\text{mm}$
8. Apex Offset:  $< 50\mu\text{m}$

REV	DESCRIPTION	DATE	承認	審核	繪圖	客戶P/N	日期	2016/11/17	O-DEAR 歐迪爾股份有限公司 O-DEAR INTERNATIONAL CORP.
1.0	Original Release	2016/11/17	批准				產品編碼	BB-FD-G502CB-LL000	
			2016.11.17				圖面案號		歐迪爾P/N: DQG-G50-2C-nM-B-LL
			工程						比例: 單位:mm 版本:1.0 頁次:1/1